



MSFX Series



Circulation Equipment

Muffin fans manufactured for use in Class I, Division 2, groups B/C/D hazardous (classified) locations with an operating temperature code of T3C (320°F/160°C)

FEATURES:

- * Certified by Intertek (bearing the ETL mark) for compliance to applicable codes and standards
- Suitable for indoor use
- Single phase operation in 60 or 50 Hz applications
- Spark resistant construction
- ½" NPT conduit connection for easy power wiring
- Inlet grilles furnished for finger protection
- Functions as supply or exhaust fan
- Limited stock available for shorter lead time




APPLICATIONS:

- Small control cabinets
- Control panels

CIRC	Unit Weight (lbs)	Unit Weight (kg)	Nominal Dia	Volts AC - Phase - Hertz	Rated Watts	Max Amps	RPM	CFM	ESP	Noise (DbA)
MSFX041-116	1.0	0.45	4.5"	120-1-60	17	0.18	3,000	105	0.28"	47
MSFX041-115	1.0	0.45	4.5"	110-1-50	18	0.24	2,700	80	0.23"	42
MSFX041-216	1.0	0.45	4.5"	240-1-60	17	0.11	3,000	105	0.28"	47
MSFX041-215	1.0	0.45	4.5"	220-1-50	18	0.13	2,700	80	0.23"	42
MSFX061-116	2.0	0.91	6"	120-1-60	35	0.45	3,100	235	0.79"	45
MSFX061-115	2.0	0.91	6"	110-1-50	38	0.50	2,800	190	0.63"	50

MSFX041

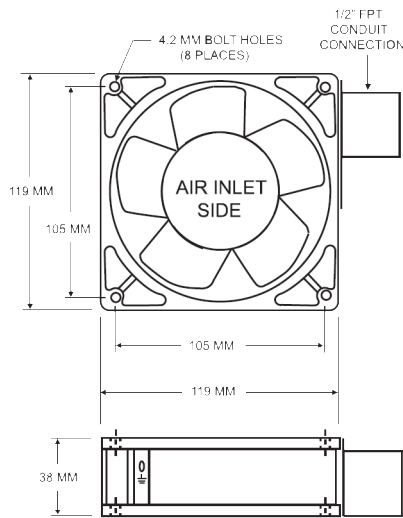

MSFX061

